

NOTE: PIGGYBACKING THE NUC XRAM CREATES A STABLE MOUNTING PLATFORM AND PROVIDES GND, 5V, A4.
THIS IS ONLY THE DUAL POKEY SELECTION AND AUDIO CONDITIONING CIRCUIT, STILL REQUIRING
STACKING OF 2 POKEYS PER ORIGINAL DATAQUE STEREO SPECIFICATION (REFERENCE SHEET 2).

576NUC GUMBY INTFC CKT

An AtariBits Production


Michael St.Pierre

v1.0


April 27th 2021

SHEET 1 OF 2

GUMBY STACK

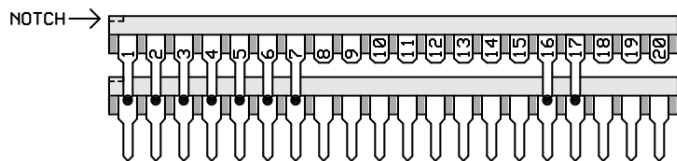

LEFT SIDE VIEW

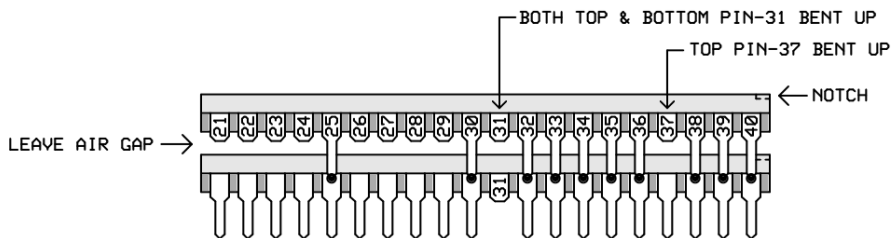

RIGHT SIDE VIEW



TOP POKEY = TO: R-IN CONNECTION
 TOP POKEY = TO: R-CSI CONNECTION
 BOTTOM POKEY = TO: L-CSI CONNECTION

576NUC GUMBY INTFC CKT		
An AtariBits Production		
Michael St.Pierre	V1.0	SHEET 2 OF 2
	April 27th 2021	